



Effects of Tillage Depth and Tractor Speed on Implement Speed for Three Tillage Implements on a Clay Loam Soil

Paul Okoko ^{a*} and Samuel Nditoi Akpankuk ^a

^a *Department of Agricultural and Food Engineering, Faculty of Engineering, University of Uyo, Uyo, Nigeria.*

Authors' contributions

This work was carried out in collaboration between both authors. Author PO conceptualized the manuscript, designed and performed the experiment. Author SNA analyzed the experimental results and also wrote the report. Both authors read and approved the final manuscript.

Article Information

DOI: 10.9734/AJAAR/2023/v22i4444

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/100707>

Original Research Article

Received: 27/03/2023

Accepted: 31/05/2023

Published: 15/06/2023

ABSTRACT

The utilization of agricultural machinery represents the main aspect contributing to the total energy input in the agricultural system. The trials were achieved using five tractor speeds (3.6, 5.4, 7.2, 9.0 and 10.8 km/hr) and five tillage depths (10, 15, 20, 25 and 30 cm) to determine implement speed at different tillage depths for 3-bottom disc plough, spring tine cultivator and offset disc harrow on a clay loam soil. The design of the experiment used were two factors, five levels factorial of Central Composite Rotatable Design of Response Surface Method. The implement speed for 3-bottom disc plough, spring tine cultivator and offset disc harrow ranged from 0.78 to 1.95, 0.67 to 2.19 and 0.70 to 2.11 m/s, respectively. The effects of tillage depths and tractor speeds on implement speed for the three tillage implements were assessed. The results indicated that increasing the tillage depth decreased the implement speed for all the tested implements but increasing the tractor speed increased the implement speed. The tractor speed had more pronounced effect on the implement speed than the tillage depth. This study therefore recommends that the availability of time and implement width should be used in determining the speed required to finish the work on time.

*Corresponding author: Email: okokokizito@gmail.com;

Keywords: Implement speed; tractor; tillage depth; clay loam soil.

1. INTRODUCTION

“Agricultural mechanization is geared towards reducing human drudgery, improve timeliness and efficiency of various farm operations, bring more land under cultivation, preserve the quality of agricultural produce and provide better rural living condition” [1]. “Tillage operations for seedbed preparations are often classified as primary or secondary” [2]. “Primary tillage constitutes the initial major soil working operation. It is normally designed in such a way, so as to reduce the soil strength, cover crop residues and rearranges. It refers to the operation performed to open up any cultivable land which is to prepare a seedbed for growing crops. Secondary tillage refers to the tillage operations following primary tillage which are performed to create proper soil tilt for seeding and planting. Both primary and secondary tillage operations are generally recommended in the field in order to get a better pulverized and deeper seedbed” [3].

“Agricultural productivity is linked with the availability of farm power. The role of farm power in the development of agriculture is something very important. The total area under cultivation and the timeliness and efficiency of accomplishing crop husbandry tasks is strongly influenced by the amount of available farm power and its efficient use. The increased usage of farm power for cultivation creates further demand for related agricultural machinery for harvesting and storage and generates employment opportunities in the agricultural service and industry” [4]. Hunt [5] stated that “farm machinery field performance measures the rate and quality at which the operations are accomplished”.

Okoko and Olosunde [6] investigated “the parameters affecting tractor fuel consumption during primary tillage operation in Uyo, Akwa Ibom State, Nigeria and reported that increase in ploughing depth and ploughing speed increases tractor fuel consumption”.

“Use of agricultural mechanization is considered as the main factor contributing to the total energy inputs in agricultural system and tillage is one area where massive power is used. The three items that are involved in tillage are; the source of power, the soil and the implement” [7]. “Condition of the soil at tillage time and

capacities of the implements and tractors have to be properly understood before selection and matching for a particular task. Proper selection and matching of implements to tractors is a major factor in reducing energy consumption and breakages that may occur on implements and tractors as a result of under loading or overloading” [8]. “It is recognized that the application of energy saving methods can make effective contributions to economy. This can be possible by choosing economical and effective field operation methods in all agricultural areas” [9].

Alele et al. [10] investigated “the effects of depth and speed on power requirements for disc and mouldboard ploughs in silt loam soils and observed that tillage depth and forward speed both led to increase in power requirement for the implements. They reported that the mouldboard plough had highest values of power requirement at all levels of the parameters investigated while the increase in power requirement per unit increase in speed was slightly higher for disc plough”.

Nta et al [11] conducted “a test on the effect of tillage on soil physico-chemical properties in South-Western Nigeria and reported that tillage practices resulted in the decline of soil macro and micro nutrients and that higher declines were observed after second disc ploughing”.

The objectives of this research work are to examine the effects of tractor speed and tillage depth on implement speed for three implements on a clay loam soil and carryout statistical analysis.

2. MATERIALS AND METHODS

2.1 Study Location

The study was conducted at the Department of Agricultural and Food Engineering demonstration farm in the University of Uyo located in Uyo local government area of Akwa Ibom state, Nigeria.

2.2 Experimental Design

“The design of the experiment used were two factors, five levels, factorial central composite rotatable design (CCRD) of response surface

methodology. Five levels of tillage depths (10, 15, 20, 25 and 30 cm) and tractor speeds (3.6, 5.4, 7.2, 9.0 and 10.8 km/hr) were chosen” [12].

“An experimental plot of 100 m long by 50 m wide was used for each implement. A plot of 50 m by 50 m was used as a practice area before the beginning of the experimental runs to enable the tractor and the implement to reach the selected tractor speed and tillage depth. Tillage depth was measured as a vertical distance from the top of the undisturbed soil surface to the implements deepest penetration using a steel measuring tape. The different tractor speeds (3.6 – 10.8 km/hr) were achieved by selecting appropriate gears and adjusting engine throttle at engine speeds of 1600 – 2000 rpm while the tillage depths of (10- 30 cm) were achieved by using tractor depth controller through its quadrant. Time taken for each implement to travel a distance of 100 m was taken and recorded” [12].

2.3 Determination of Implement Speed

The implement speed of all the tillage implements was determined using the equation below.

$$S = \frac{D}{T} \quad (1)$$

Where;

S= Implement travel speed, *m/s*
 D =Distance travelled, *m*
 T=Time taken to travel the distance, *sec*

3. RESULTS AND DISCUSSION

3.1 Experimental Test Results

The average summary of the experimental results for the two factors, five levels factorial Central Composite Rotatable Design (CCRD) of the response surface methodology (RSM) for implement speed is presented in Table 1.

From this Table, it could be observed that the implement speed for 3-bottom disc plough, spring tine cultivator and offset disc harrow ranged from 0.78 to 1.95, 0.67 to 2.19 and 0.70 to 2.11 m/s, respectively. This shows that the spring tine cultivator had the highest speed even though all the implements were pulled at the same tractor speed.

3.2 Effects of Tillage Depth and Tractor Speed on Implement Speed at the Study Location

The effects of tillage depth and tractor speed on implement speed for 3-bottom disc plough, spring tine cultivator and offset disc harrow at the study location are presented in Figs. 1, 2 and 3 respectively. It could be seen from the figures that the implement speed increased with increases in tractor speed but decreased with increases in tillage depth. From the plots, it could also be observed that the plots of implement speed against the tillage depth is almost parallel to the axis of the tillage depth. But on the other hand, the plots of implement speed against the tractor speed is far from being parallel to the axis of the tractor speed. These results indicate that both factors have effect on the implement speed with the tractor speed having a more pronounced effect on the implement speed than the tillage depth.

3.3 Analysis of Variance for tillage depth and tractor speed on implement speed at the study location

Analysis of variance (ANOVA) for the effects of tillage depth and tractor speed on implement speed for 3-bottom disc plough, spring tine cultivator and offset dic harrow at the study location is presented in Tables 2, 3 and 4 respectively. From these tables, it was revealed that the effect of tractor speed on implement speed for these tillage implements at the study location are statistically significant at 0.05 level of significance, but the effects of tillage depth on implement speed for spring tine cultivator and offset disc harrow in this location is not statistically significant at 0.05 level of significance.

The interaction plots shows the impact of tillage depth and tractor speed on implement speed for 3-bottom disc plough, spring tine cultivator and offset disc harrow on clay loam soil are shown in Figs. 4, 5 and 6 respectively. Interaction means that the effect of one factor depends on the level of the other factors, each point in the interaction plot shows the mean implement speed at different combinations of factor levels. If the lines are not parallel, then the plot indicates that there is an interaction between the two factors while parallel lines indicate otherwise. From Figs. 4 to 6, it could be seen that there is an interaction between the two factors for 3-bottom disc plough, spring tine cultivator and offset disc harrow. It

could also be observed from these figures that the slope of the line for tractor speed is steeper than the slope of the line for tillage depth which confirms that the tractor speed has a more pronounced effect on implement speed than the tillage depth.

Table 1. Experimental results for implement speed using three implements on clay loam Soil

S/N	Factor 1	Factor 2	IS(m/s)-3BDP	IS(m/s)-STC	IS(m/s)-ODH
	D_T (cm)	S_T (km/hr)			
1	10	7.2	1.95	1.75	1.86
2	15	5.4	1.27	1.43	1.38
3	15	9.0	1.87	2.19	2.11
4	20	3.6	0.78	0.67	0.70
5	20	7.2	1.57	1.32	1.38
6	20	7.2	1.50	1.30	1.36
7	20	7.2	1.54	1.33	1.49
8	20	7.2	1.56	1.31	1.35
9	20	7.2	1.51	1.30	1.37
10	20	10.8	1.83	1.57	1.64
11	25	5.4	1.03	1.25	1.41
12	25	9.0	1.65	1.75	1.78
13	30	7.2	1.43	1.24	1.25

D_T = Tillage Depth (cm); S_T = Tractor Speed (km/hr); IS = Implement speed (m/s); 3BDP = 3-Bottom Disc Plough; STC = Spring Tine Cultivator; ODH = Offset Disc Harrow

Table 2. Analysis of Variance of implement speed for 3-bottom disc plough at the study location

Source	Sum of Square	df	Mean Square	F-Value	P-Value
Tillage Depth (cm)	0.1875	1	0.1875	66.78	< 0.0001
Tractor Speed (km/hr)	0.9185	1	0.9185	327.12	< 0.0001
Error	0.0037	4	0.0009		
Total	1.28	12			

Table 3. Analysis of Variance of implement speed for spring tine cultivator at the study location

Source	Sum of Square	df	Mean Square	F-Value	P-Value
Tillage Depth (cm)	0.2241	1	0.2241	4.38	0.0628
Tractor Speed (km/hr)	0.7803	1	0.7803	15.26	0.0029
Error	0.0007	4	0.0002		
Total	1.52	12			

Table 4. Analysis of Variance of implement speed for offset disc harrow at the study location

Source	Sum of Square	df	Mean Square	F-Value	P-Value
Tillage Depth (cm)	0.1925	1	0.1925	4.26	0.0660
Tractor Speed (km/hr)	0.7400	1	0.7400	16.37	0.0023
Error	0.0130	4	0.0032		
Total	1.38	12			

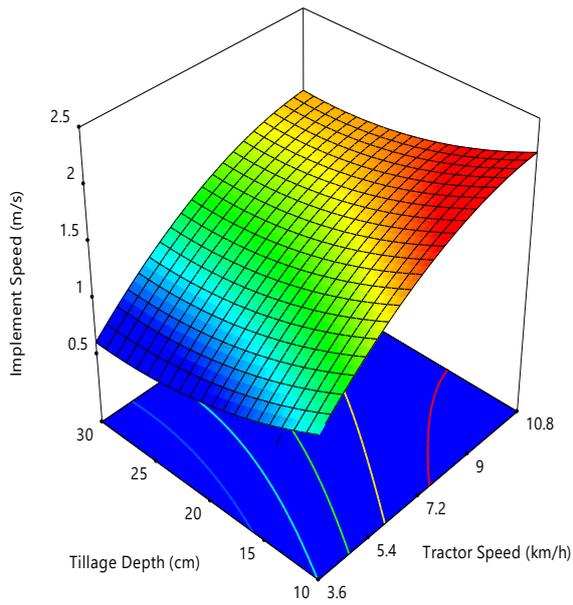


Fig. 1. Response surface plot of tillage depth and tractor speed against implement speed for 3-DBP at the study location

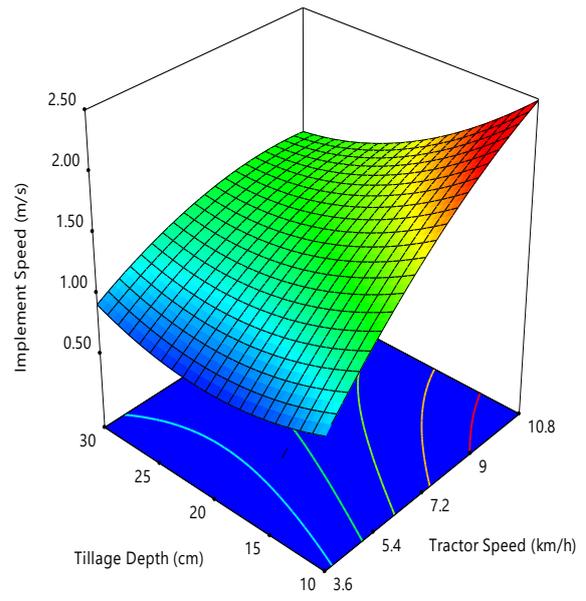


Fig. 2. Response surface plot of tillage depth and tractor speed against implement speed for STC at the study location

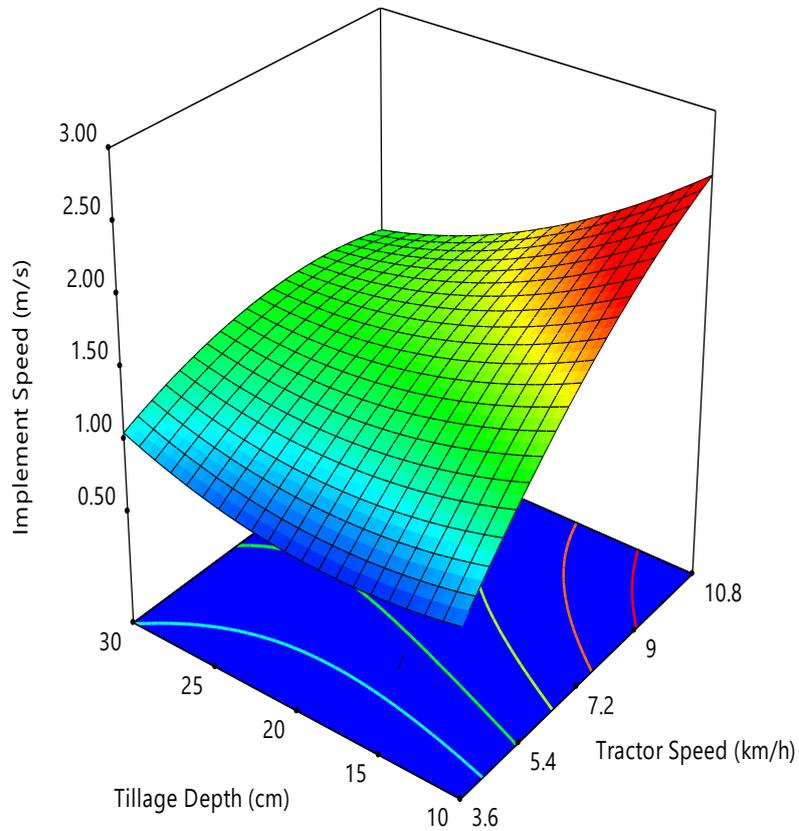


Fig. 3. Response surface plot of tillage depth and tractor speed against implement speed for ODH at the study location

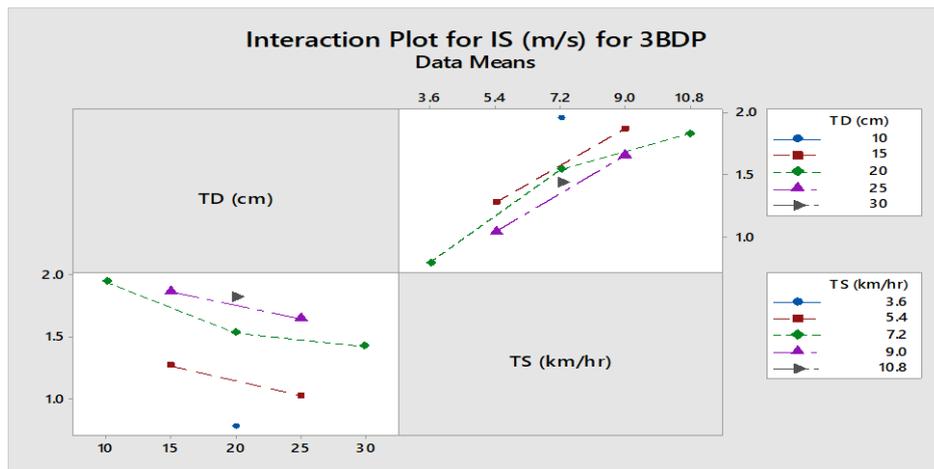


Fig. 4. Interaction plot of implement speed (m/s) for 3-bottom disk plough (3-BDP) at the study location

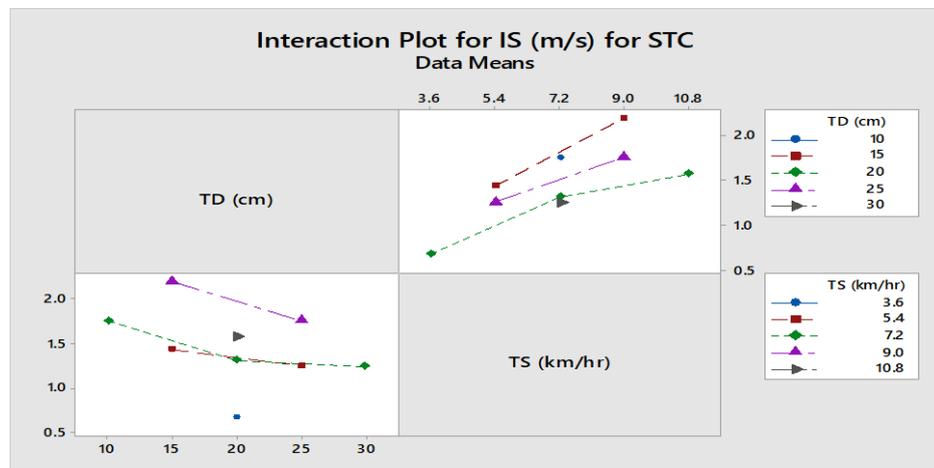


Fig. 5. Interaction plot of implement speed (m/s) for spring tine cultivator (STC) at the study location

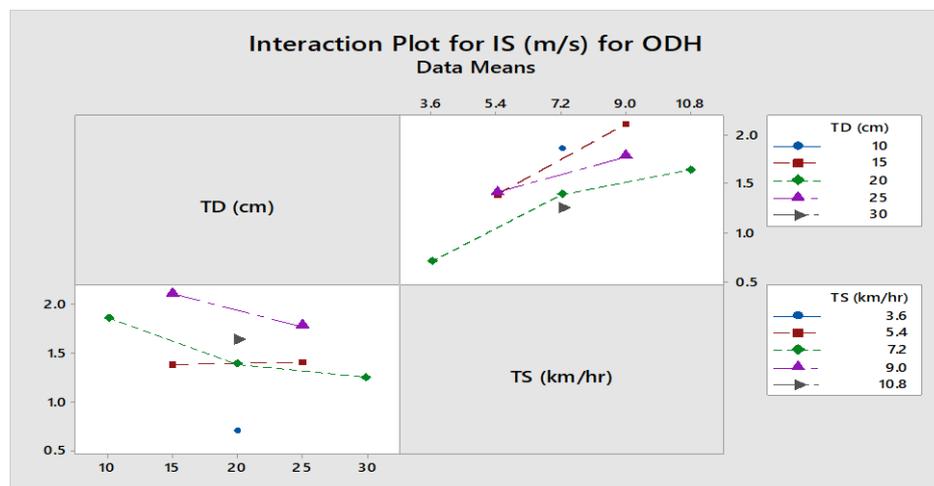


Fig. 6. Interaction plot of implement speed (m/s) for offset disk harrow (ODH) at the study location

4. CONCLUSION

The effects of tillage depths and tractor speeds on implement speed for 3-bottom disc plough, spring tine cultivator and offset disc harrow on a clay loam soil were evaluated. The results indicated that increasing tillage depth decreased the implement speed while increasing the tractor speed increased the implement speed. The spring tine cultivator had the highest speed even though all the implements were pulled at the same tractor speed.

The tractor speed had a more pronounced effect on the implement speed than the tillage depth. Analysis of Variance (ANOVA) showed that both tillage depth and tractor speed had significant effect ($p \leq 0.05$) on implement speed for 3-bottom disc plough. But tillage depth had no significant effect ($p \leq 0.05$) on implement speed for spring tine cultivator and offset disc harrow. This study therefore recommends that the availability of time and implement width should be used in determining the speed required to finish the work on time.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Onwualu AP, Akubuo CO, Ahaneku IE. Fundamentals of engineering for agriculture. Immaculate Publication Limited. Enugu. 2006:82–83.
2. Mandal S, Bhattacharyya B, Mukherjee S. Design of rotary tiller's blade using specific work method. Journal of applied Mech Eng. 2015;4:164.
3. Faleye T, Farounbi AJ, Ogundipe OS, Adebija JA. Testing and evaluation of farm machines: An essential step for developing mechanization in Nigeria. Int. Res. J. Agric. Sci. Soil Sci. 2014;4(2):47-50.
4. Kong D, Ling T, Xu G. Small tractors in China. Agricultural mechanization in Asia, Africa and Latin America. 1983;14(1):44-50.
5. Hunt DR. Farm power and machinery management. Iowa State University. University press, Ames, Iowa- USA. 7th edition. 1979;366.
6. Okoko P, Olosunde WA. Parameters affecting tractor fuel consumption during primary tillage operation in Uyo, Akwa Ibom State, Nigeria. International Journal of Environment, Agriculture and Biotechnology. 2023;8(2):127-132.
7. Olatunji O, Davies R. Effect of weight and draught on the performance of disc plough on sandy loam soil. Research Journal of Applied Sciences, Engineering and Technology. 2009;1(1):22-26.
8. Javad A, Hajiamad A. Effect of a new combined implement for reducing secondary tillage operation. International Journal of Agriculture and Biology 2006;8(6):724-7.
9. Bayhan Y, Kayisohlu B, Gonulol E, Yalcin H, Sungur N. Possibilities of direct drilling and reduced tillage in second crop silage corn. Soil and Tillage Research. 2006; 88(1):1-7
10. Alele JO, Ngunjiri GMN, Njue MR. Effects of depth and speed on power requirements for disc and mouldboard ploughs in silt loam soils. International Journal of Scientific and Technology Research. 2018;7(8):167-174
11. Nta SA, Lucas EB, Ogunjimi LAO. Effect of tillage on soil physic-chemical properties in South Western Nigeria. International Journal of Research in Agriculture and Forestry. 2017;4(7): 20-24.
12. Okoko P, Ajav EA. Modeling of tillage operation parameters for draft and power requirement for three tillage implements in a loamy soil. Poljoprivredna tehnika. 2021;46(4):10-30

© 2023 Okoko and Akpankuk; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/100707>